


IMPROVED QUALITY

BETTER PERFORMANCES




INNOVATION
WITHIN TRADITION

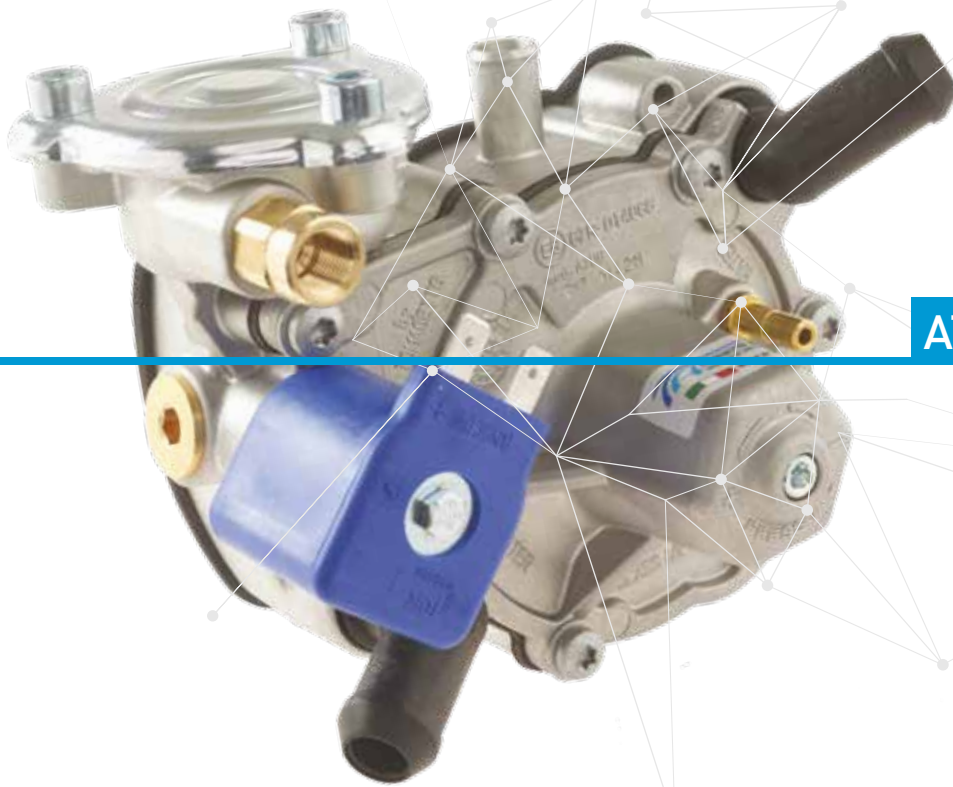

AT09 NORDIC

NEW LPG REDUCER

THE EVOLUTION OF THE SPECIES

DESIGNED    IN ITALY
& MANUFACTURED

Model AT09 NORDIC

THE NEW LPG REDUCER NORDIC IS THE LAST EVOLUTION OF THE AT09 FAMILY
IT HAS BEEN DESIGNED IN ORDER TO FURTHER IMPROVE ALASKA AND ARTIC MODELS,
THANKS TO OUR 35 YEARS OF EXPERIENCE

BETTER PERFORMANCES

- higher heating compared to previous Alaska and Artic reducers
- higher supportable engine power up to 125 kW
- less pressure increase at cut-off



NEW FEATURES

- Integral body
- Complete separation of gas circuit and water circuit
- Pre-heating of gas at reducer's inlet
- Improved LPG circuit and deeper water circuit for better heat exchange
- Improved water fitting fixing system
- Possibility of higher or lower heating (with additional inserts)



TECHNICAL DATA

	MODEL AT09 NORDIC
Type of product	LPG sequential reducer
Material	Die cast aluminium body
Weight	1.30 kg
Dimensions (mm)	125x125x105 mm
Max inlet pressure	3 MPa (30 bar)
Outlet pressure *	adjustable from 90 to 180 kPa
Coil voltage	12 V DC
Coil power	17 W
Coil connection	Fast-on (amp on request)
Inlet Connection	M10x1 pipe ø 6 mm (M12x1 ø 8 mm upon request)
Outlet connection	Fixed fitting ø 12 mm
Engine power	up to 125 kW
Working temperature	-20° C/+120° C

* referred to the MAP

HOMOLOGATIONS

Ⓔ 67R-014066

Ⓔ 10R-036564

